


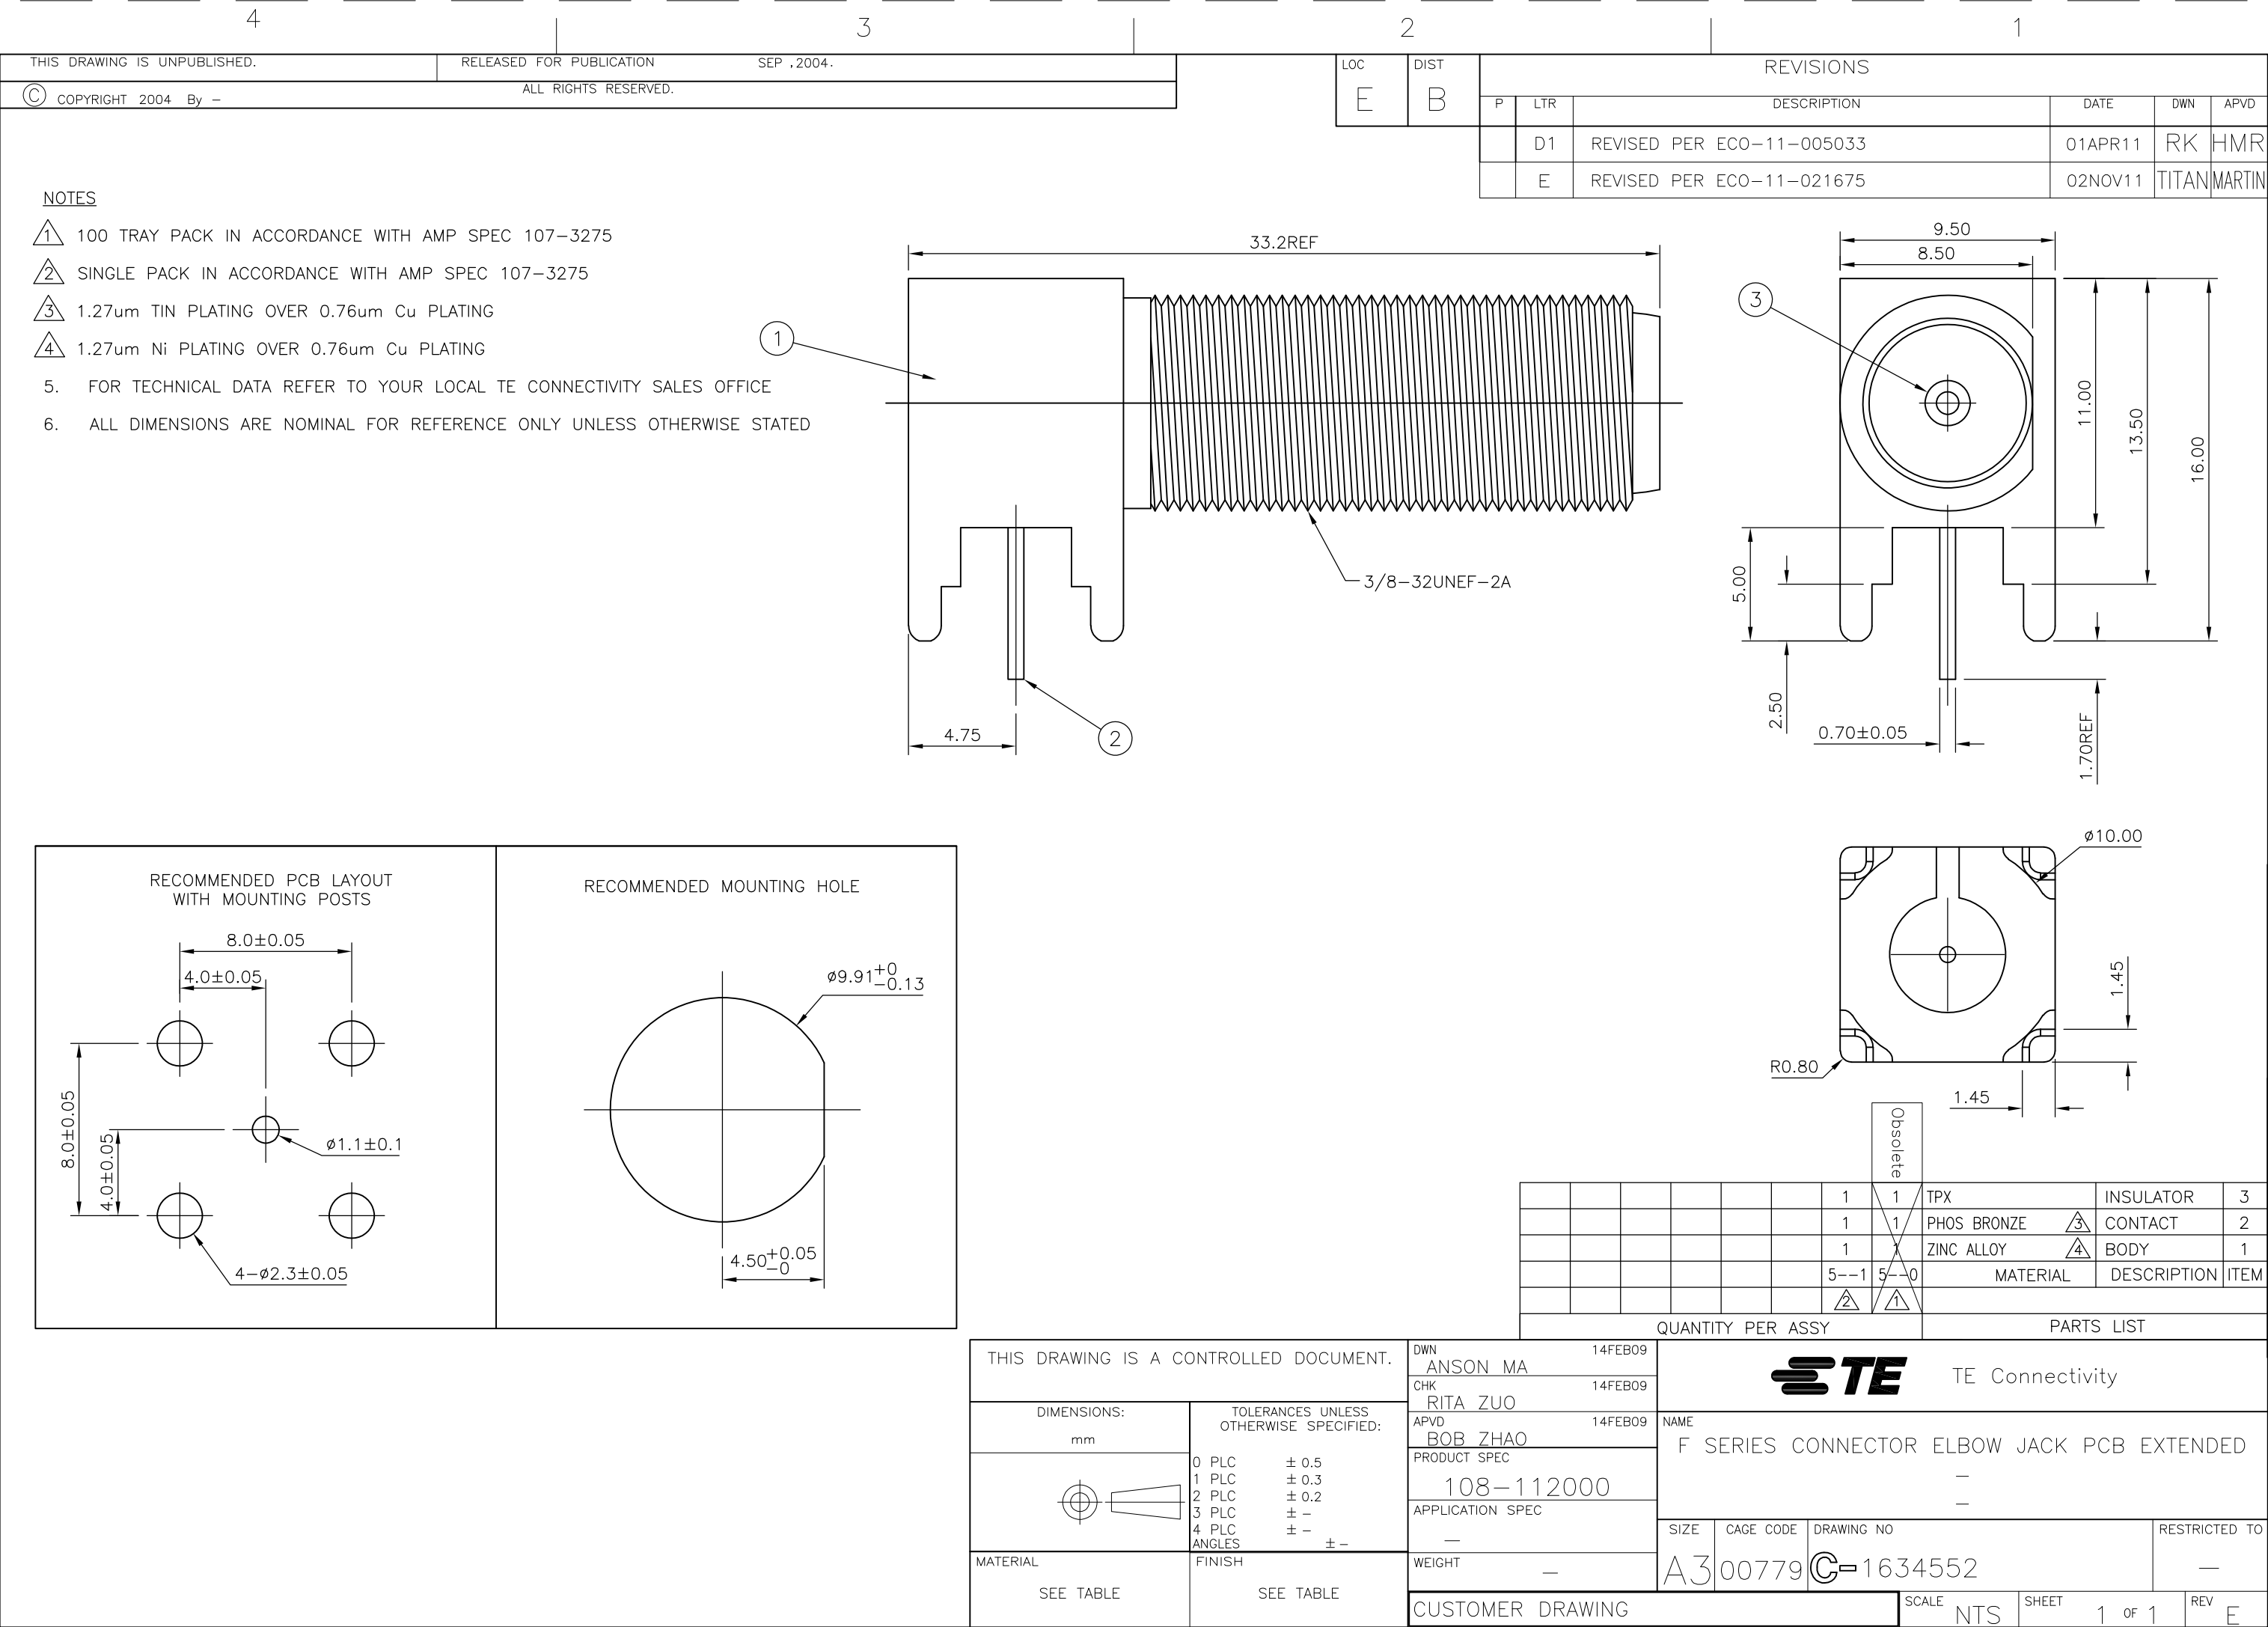

NOTES

1

100 TRAY PACK IN ACCORDANCE WITH AMP SPEC 107-3275

2

SINGLE PACK IN ACCORDANCE WITH AMP SPEC 107-3275

3

1.27um TIN PLATING OVER 0.76um Cu PLATING

4

1.27um Ni PLATING OVER 0.76um Cu PLATING

5. FOR TECHNICAL DATA REFER TO YOUR LOCAL TE CONNECTIVITY SALES OFFICE

6. ALL DIMENSIONS ARE NOMINAL FOR REFERENCE ONLY UNLESS OTHERWISE STATED

33.2REF

3/8-32UNEF-2A

4.75

2

1

9.50

8.50

11.00

13.50

16.00

5.00

2.50

0.70±0.05

1.70REF

3

RECOMMENDED PCB LAYOUT WITH MOUNTING POSTS

8.0±0.05

4.0±0.05

8.0±0.05

4.0±0.05

ø1.1±0.1

4-ø2.3±0.05

RECOMMENDED MOUNTING HOLE

ø9.91⁺⁰_{-0.13}

4.50^{+0.05}₋₀

Obsolete

1

1

TPX

INSULATOR

3

1

1

PHOS BRONZE

3

CONTACT

2

1

1

ZINC ALLOY

4

BODY

1

5--1

5--0

MATERIAL

DESCRIPTION

ITEM

2

1

QUANTITY PER ASSY

PARTS LIST

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

0

PLC

± 0.5

1

PLC

± 0.3

2

PLC

± 0.2

3

PLC

± -

4

PLC

± -

ANGLES

± -

MATERIAL

SEE TABLE

TOLERANCES UNLESS OTHERWISE SPECIFIED:

FINISH

SEE TABLE

DWN

ANSON MA

14FEB09

CHK

RITA ZUO

14FEB09

APVD

BOB ZHAO

14FEB09

PRODUCT SPEC

108-112000

APPLICATION SPEC

—

WEIGHT

—

CUSTOMER DRAWING

STE

TE Connectivity

NAME

F SERIES CONNECTOR ELBOW JACK PCB EXTENDED

—

—

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

C-1634552

—

CUSTOMER DRAWING

SCALE

NTS

SHEET

1 OF 1

REV

E

1470-19 (3/11)